
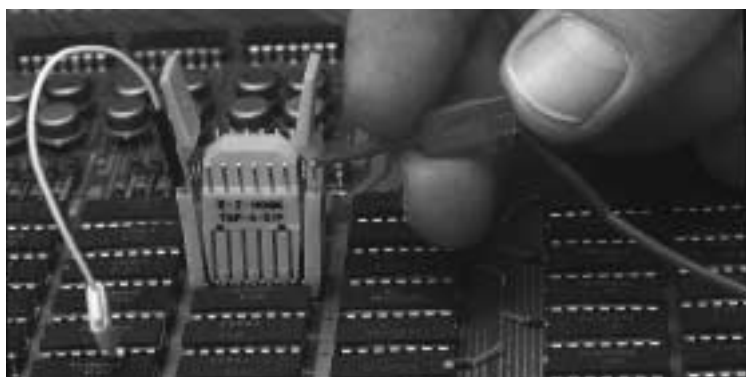


P25 PICO-HOOK ADAPTOR with .025" (.635mm) SQUARE PIN

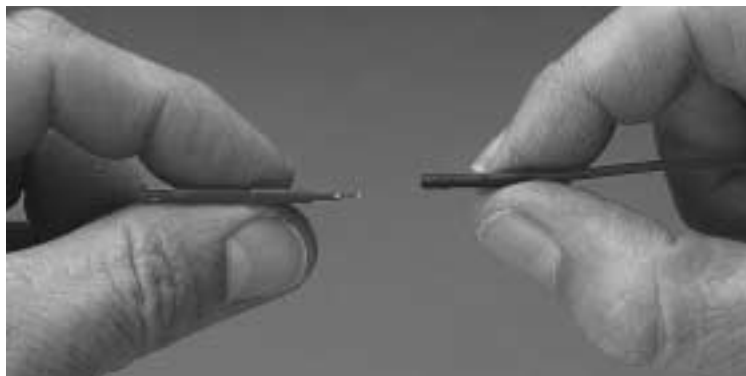


| Part Number | Description |
|---------------|---|
| P25-(color) | Pico-Hook with 025" Square Pin, Gold Plated |
| P25-S | Assortment - 1 each of 10 Solid Colors |
| P25-14S | 14 Hook Kilo-Color Assortment |
| P25-16S | 16 Hook Kilo-Color Assortment |
| P25SS-(color) | Pico-Hook with 025" Square Pin, Stainless Steel |
| P25SS-S | Assortment - 1 each of 10 Solid Colors |


Colors: Black, Brown, Red, Orange, Yellow, Green, Blue, Violet, Gray and White PLUS Kilo-Color Capability See inside back cover for Kilo-Color Ordering Information.

Construction: P25 Is A One-Piece, Gold-Plated Beryllium Copper Blade That forms Hook, Conductor, and .025" Square Pin. P25SS Is One Piece Stainless Steel Contact Blade. Both P25 and P25SS permit connection to .025" Square or .030" Round Push-On Jumpers.


Hook is designed for connection directly to a single leg of a DIP or to other components with a maximum diameter of .025". Lightweight and Finger-eze Hypo Action permit hook ups to delicate wires where weight and leverage may damage component. Barrier on tip prevents shorting between DIP legs.

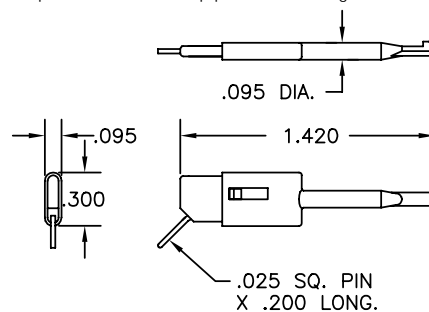

E-Z-PICO-HOOK™ TEST LEADS


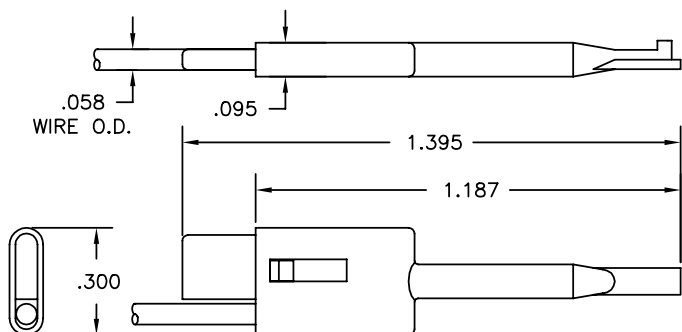


The E-Z PICO-HOOK is designed specifically for narrow test contact access. Illustrated by integrated circuit in-line pins. An ultra-thin blade and housing allows connector stacking and easier access.



Actual Size

Patent Applied for

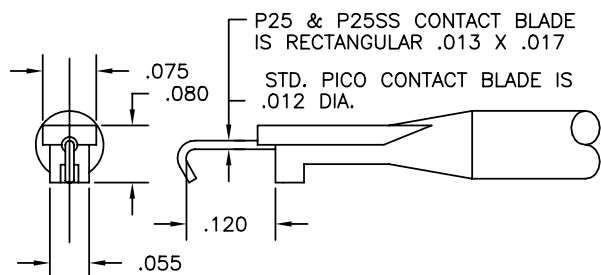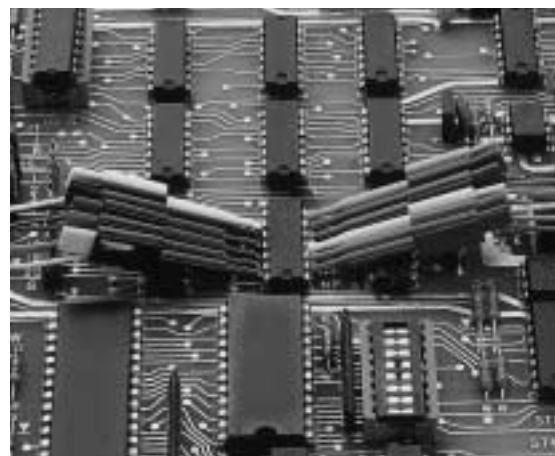

EXTENDED HOOK DETAIL

SCALE 4X FULL SIZE
ALL DIMENSIONS ARE IN INCHES

| COLOR CHART | |
|-------------|--------|
| Black | Green |
| Brown | Blue |
| Red | Violet |
| Orange | Grey |
| Yellow | White |

PICO-HOOK: One-Piece, Gold Plated Conductor and Hook per MIL G45204. Made for connections over component leads up to .025" (.635mm) diameter. Durable plastic body and plunger. Stainless steel compression spring provides approximately 8 ounces (227 grams) contact pressure.

LEAD WIRE: 28AWG 19 x 40 T.C. PVC insulation.
24AWG 19 x 36 S.C. Teflon insulation to 200°C.

COLOR CHOICES

1. Single Color Unit: Add desired color to Part No. See Color Chart.
2. Color Assortment (1 each of 10 Colors): Add -S after Part Number.
3. Multicolor Unit: See Kilo-Color Ordering Information on inside back cover.

For Non-Magnetic Pico-Hook add -NM to part number Example: P713-NM-(Length)

E-Z-PICO-HOOK™ TEST LEADS

PICO-HOOK TO PICO-HOOK JUMPER (Illustration NOT to scale)


| PVC | Lead Length | | TEFLON |
|---------|-------------|-------|---------|
| P704-3 | 3" | 8 cm | P304-3 |
| P704-6 | 6" | 15 cm | P304-6 |
| P704-12 | 12" | 30 cm | P304-12 |
| P704-18 | 18" | 45 cm | P304-18 |
| P704-24 | 24" | 60 cm | P304-24 |
| P704-36 | 36" | 90 cm | P340-36 |



PICO HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See Basic PICO HOOK.

PICO-HOOK TO .025 SQUARE SOCKET (FEMALE) (Illustration NOT to scale)

| PVC | Lead Length | | TEFLON |
|---------|-------------|-------|---------|
| P703-3 | 3" | 8 cm | P303-3 |
| P703-6 | 6" | 15 cm | P303-6 |
| P703-12 | 12" | 30 cm | P303-12 |
| P703-18 | 18" | 45 cm | P303-18 |
| P703-24 | 24" | 60 cm | P303-24 |
| P703-36 | 36" | 90 cm | P303-36 |



PICO-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See Basic PICO HOOK.
 .025" (.635mm) SQ. SOCKET: Brass Body. Gold Plated BeCu Springs. Heat Shrink Insulation. Crimp Assembly. See P/N 9205-HS.

PICO-HOOK TO .025 SQUARE PIN (MALE) (Illustration NOT to scale)


| PVC | Lead Length | | TEFLON |
|---------|-------------|-------|---------|
| P730-3 | 3" | 8 cm | P330-3 |
| P730-6 | 6" | 15 cm | P330-6 |
| P730-12 | 12" | 30 cm | P330-12 |
| P730-18 | 18" | 45 cm | P330-18 |
| P730-24 | 24" | 60 cm | P330-24 |
| P730-36 | 36" | 90 cm | P330-36 |



PICO-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See Basic PICO HOOK.
 .025" (.635mm) SQUARE PIN PLUG: Gold-Plated Brass Body. Heat Shrink Insulator. Crimp Assembly. See P/N 9265-HS.

PICO-HOOK TO LEAD ONLY (Illustration NOT to scale)

| PVC | Lead Length | | TEFLON |
|---------|-------------|-------|---------|
| P713-3 | 3" | 8 cm | P313-3 |
| P713-6 | 6" | 15 cm | P313-6 |
| P713-12 | 12" | 30 cm | P313-12 |
| P713-18 | 18" | 45 cm | P313-18 |
| P713-24 | 24" | 60 cm | P313-24 |
| P713-36 | 36" | 90 cm | P313-36 |



PICO-HOOK, LEAD WIRE DESCRIPTIONS AND COLOR CHOICES: See Basic PICO HOOK.

PICO HOOK TO YOUR CABLE ASSEMBLY

BECAUSE OF THE CONSTRUCTION METHOD OF THE PICO HOOK, THEY CAN READILY BE ATTACHED TO DIFFERENT TYPES OF LEAD WIRES.

IF YOU HAVE A SPECIAL APPLICATION THAT REQUIRES A MULTI LEAD ASSEMBLY USING OUR PICO HOOKS' SMALL SIZE AND FLEXIBILITY, WE CAN INSTALL THEM ON THE CABLE OF YOUR CHOICE OR DESIGN. UP TO 100 DIFFERENT COLOR COMBINATIONS ARE AVAILABLE FOR LEAD IDENTIFICATION. THE MAXIMUM WIRE SIZE IS 24AWG WITH .060" DIA. INSULATION.

NOTE: Color Assortment (1 each of 10 Colors): Add -S after Part Number.

